


# Ennis Fabrics

Fabric **Heavenly** 

### **HEAVENLY FABRIC**

Fabric Card

While every effort is made to present as accurate reproduction as possible, colors on actual products may vary slightly from digital reproductions.

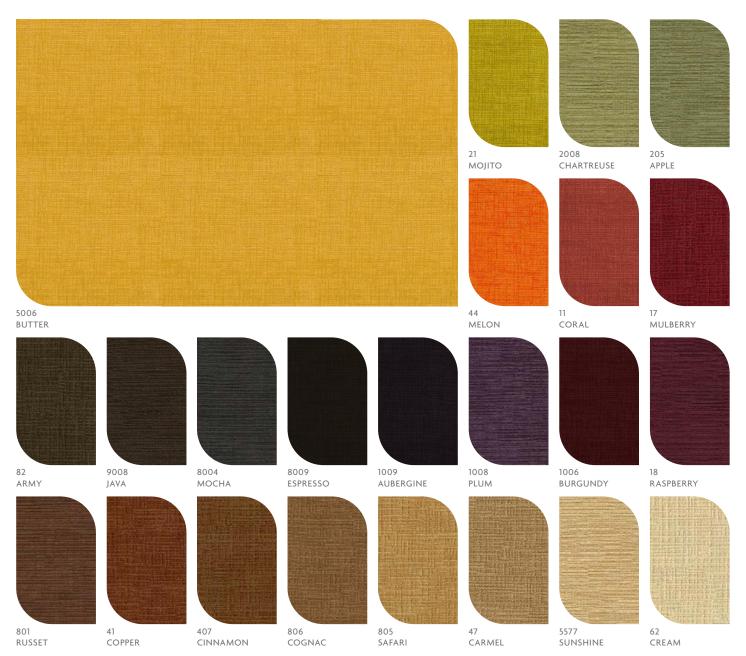

NOTE: We do not guarantee matches and recommend you examine a sample prior to excepting a color match.







ISO 14001 certified






Borgo Contract Seating

## **HEAVENLY FABRIC**

Fabric Card

While every effort is made to present as accurate reproduction as possible, colors on actual products may vary slightly from digital reproductions.

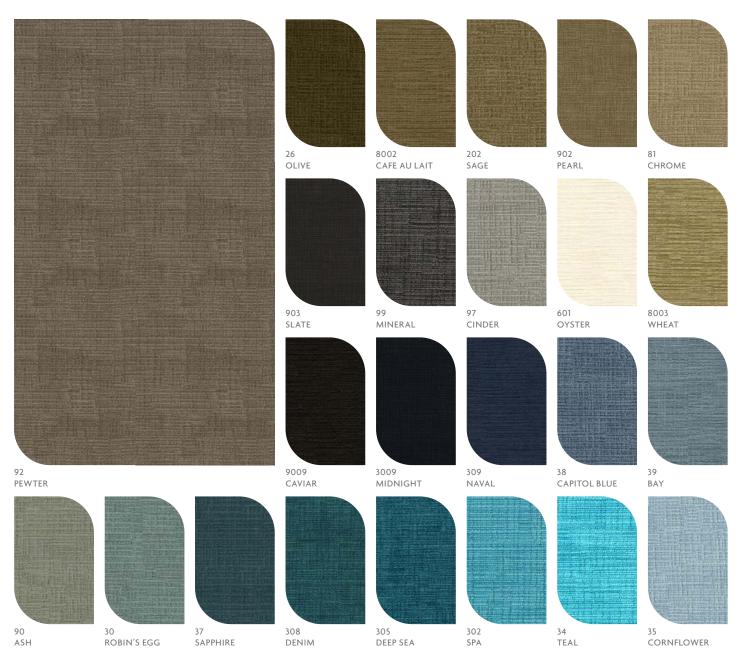

NOTE: We do not guarantee matches and recommend you examine a sample prior to excepting a color match.













Borgo Contract Seating

#### **HEAVENLY FABRIC**

Fabric Card

| SPECIFICATIONS |                   |  |
|----------------|-------------------|--|
| Contents       | 100% Polyester    |  |
| Weight         | 14 oz./linear yd. |  |
| Width          | 55"               |  |
| Backing        | Acrylic           |  |
| Cleaning Code  | SW                |  |

| PERFORMANCE                           |                              |  |
|---------------------------------------|------------------------------|--|
| Abraison Resistance*<br>ASTM D-4157   | 125 000+<br>Double Rubs      |  |
| Pilling Resistance<br>ASTM D-3511     | Class 4.5                    |  |
| Colourfastness to Light<br>AATCC 16-A | L3<br>min 40 hrs             |  |
| Colorfastness to Crocking AATCC 8     | Class 4-dry<br>Class 4.5-wet |  |

#### **FLAMMABILITY**

State of Calif. Tech Bulletin NFPA 260 Class 1, 117:2013 UFAC Class 1

This information is offered for your general guidance only. It's accurate to the best of our knowledge and is not intended to relieve the user from its responsibility to investigate and understand other pertinent sources of information to comply with all laws and procedures applicable to the sale handling and use of this material.













<sup>\*</sup>This term and any corresponding data refer to typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.