



Fabric Apollo Silicone

# **APOLLO SILICONE FABRIC**

Fabric Card

While every effort is made to present as accurate reproduction as possible, colors on actual products may vary slightly from digital reproductions.



NOTE: We do not guarantee matches and recommend you examine a sample prior to excepting a color match.







ISO 14001 certified






# **APOLLO SILICONE FABRIC**

Fabric Card

While every effort is made to present as accurate reproduction as possible, colors on actual products may vary slightly from digital reproductions.

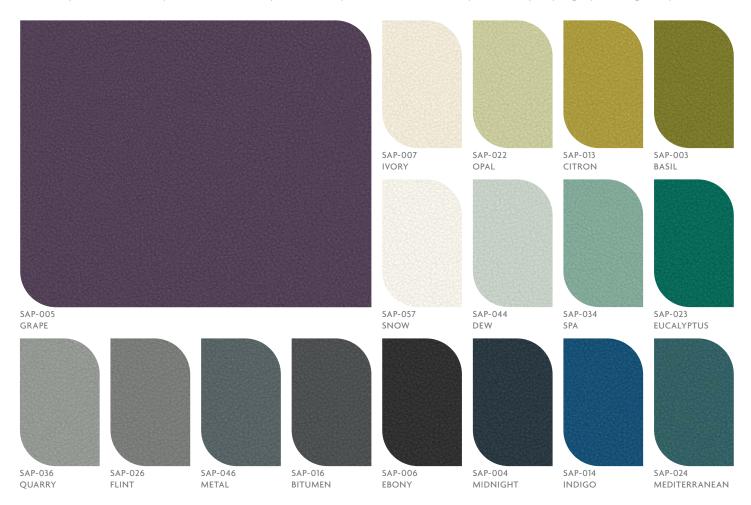

NOTE: We do not guarantee matches and recommend you examine a sample prior to excepting a color match.







ISO 14001 certified





## **APOLLO SILICONE FABRIC**

Fabric Card

TECHNICAL INFORMATION		
Content: 45% Sio (TM) Silicone Face, 55% Polyester Backing	Backing: 100% Polyester Knit	Visual Repeat: None
Width: 54"	Finish: None	Directionality: False
Weight: 28 oz./linear yard	Cleaning Code: CFC, BC	Shown RR: False

PERFORMANCE	
Surface Abrasion: Heavy Duty	Passes 225,000 Double Rubs (Wyzenbeek)
Breaking Strength:	Warp: 250.0 lbs. / Fill: 250.0 lbs.
Seam Slippage:	Warp: 102.0 lbs. ∕ Fill: 102.0 lbs.
Colorfastness to Crocking:	Dry: Class 4 min / Wet: Class 4 min
Colourfastness to Light:	500 hours

### **FLAMMABILITY**

Passes Cal 117-2013; NFPA 260/UFAC Class 1; ASTM E84 Class 2 or B; FMVSS 302; IMO FTP 2010 Code MSC.307(88), Part 8, 3.1 & 3.2

#### **CLEANING**

CFC: Coated Fabrics Cleaning - Please refer to cleaning information section on Mayer website for complete cleaning info.

BC: Bleach Cleanable - 1 parts bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.











