




Dublin Leather Card

DUBLIN LEATHER

Leather Card

While every effort is made to present as accurate reproduction as possible, colors on actual products may vary slightly from digital reproductions.

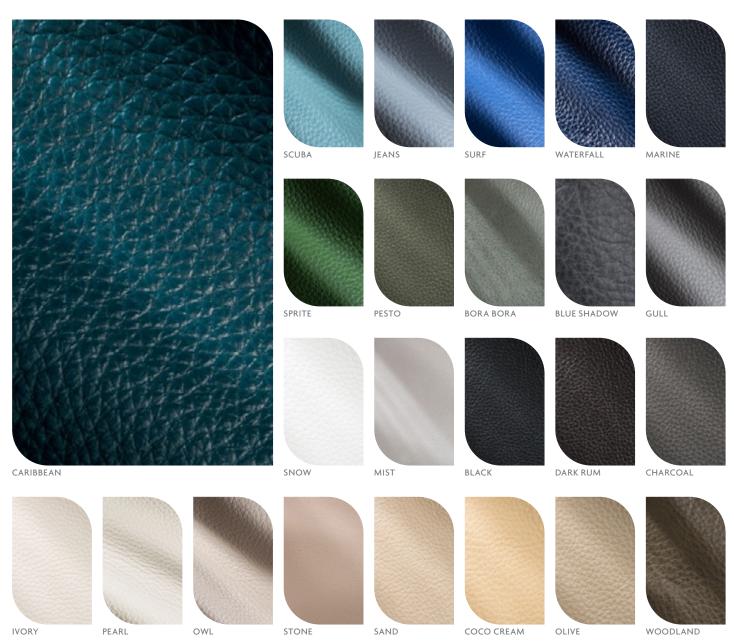

NOTE: We do not guarantee matches and recommend you examine a sample prior to excepting a color match.







ISO 14001 certified





DUBLIN LEATHER

Leather Card

While every effort is made to present as accurate reproduction as possible, colors on actual products may vary slightly from digital reproductions.



NOTE: We do not guarantee matches and recommend you examine a sample prior to excepting a color match.













© Borgo Contract Seating - February 17, 2023 2:34 PM

DUBLIN LEATHER

Leather Card

SPECIFICATIONS

Average Thickness 1.2 - 1.4 mm
Tensile Strength 40 - 70 %
Elongation at Break 35 - 70 %
Tear Strength > 20 N

Flexing Endurance (20,000 cycles)

No Damage

Color Fastness to Artificial Light min. 4 (Blue Scale)

Color Fastness to Rubbing (500 Dry Rubs, 100 Wet Rubs) min. 4 (Gray Scale), min. 3/4 (Gray Scale)

Finishing Adhesion > 3 N/cm

Determination of pH min 3, se pH < 4, pH < 0.7

Ignitability BS 5852-0 (Cigarette)

Pass
Ignitability BS 5852-1 (Match)

Pass

Fire & Burning Behavior Cigarette & Match Flame Self Extinguish

California Technical Self Extinguish

Cigarette Ignition Resistance Class 1

Boston Fire Dept Pass

Wyzenbeek (70,000 Cycles) Pass

*This term and any corresponding data refer to typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire condition. This information is offered for your general guidance only. It's accurate to the best of our knowledge and is not intended to relieve the user from its responsibility to investigate and understand other pertinent sources of information and to comply with all laws and procedures applicable to the safe handling and use of this material. Final determination of the suitability of any product for an application rests with the use.











