




Sierra Leather Card

## SIERRA LEATHER

Leather Card

While every effort is made to present as accurate reproduction as possible, colors on actual products may vary slightly from digital reproductions.

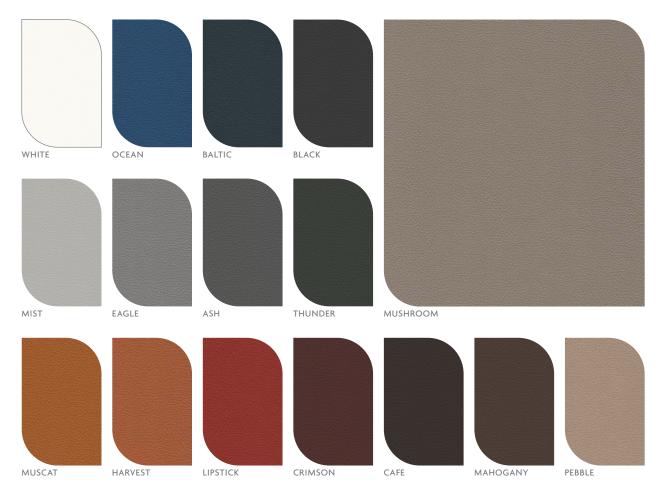

NOTE: We do not guarantee matches and recommend you examine a sample prior to excepting a color match.







ISO 14001 certified





## SIERRA LEATHER

Leather Card

## **SPECIFICATIONS**

Hide Size: Average 50 sqft

Thickness: 1.0 - 1.2 mm

Crocking: (ASTM D-5053) Dry: Class 4-5 Wet: Class 4

Abrasion: (ASTM D 3884) 2500 cycles (CS-10 wheels)

Abrasion: Wyzenbeek (ASTM D4157) 100,000 Rubs

Flex: (ASTM D-2097) 100,000 cycles

Tear Strength: (ASTM D-4075) ≥ 50 N
Breaking Force: (ASTM D-2208) ≥ 600 N

Elongation at the Break: (ASTM D-2211) 35–70%

Water Repellency: AATCC 22-2010: 93

Lightfastness: (AATCC 16, E, 72 hours) Class 4

Flammability Resistance: UFAC Class 1, CAL TB 117-2013, NFPA 260

Soil/Stain Release: AATCC 130-2015: Grade 5 represents best stain removal (immediate). Nail polish remover (5), Betadine (5), Bleach (5), Urine (5), Blood (5). Fluid Resistance: Red wine (5), Beer (5), Whiskey (4.5), Cola (5), Coffee (4.5), Red Bull (5) Mayonnaise (5), Olive Oil (5), Catsup (5), Vegetable oil (5), Chocolate (melted) (5), Lipstick (3.5), Lysol (5), Formula 409 (5), Windex (5). Test procedure modified to clean stains with 1 part household bleach/10 parts water solution.

Bleach Cleanable: BIFMA Health Care Furniture 8.1-2017 Section 7: Household bleach (sodium hypochlorite). CDC/EPA recommended ratios (1:48) parts bleach to water for the sanitizing and disinfecting of viruses and bacteria. Reference CDC/EPA and product specifications for approved dilution ratio and cleaning agent instructions for dwell time.











